

# Elitfönster Original Alu 100

## Contents

<a href="#">Top swing window AFHC</a>	<a href="#">2</a>	<a href="#">Patio door ADC, ADC2</a>	<a href="#">6</a>
<a href="#">Fixed frame frame AFKC</a>	<a href="#">3</a>	<a href="#">Fittings pack window</a>	<a href="#">8</a>
<a href="#">Side hung AFSC</a>	<a href="#">4</a>	<a href="#">Fittings pack patio door</a>	<a href="#">9</a>
<a href="#">Top hung AFÖC</a>	<a href="#">5</a>	<a href="#">Antique profile, glazing bars and mullions</a>	<a href="#">11</a>

## Standard version

### Product family

Elitfönster Original Alu 100 outward opening window and patio doors.

### Product types

Top swing window, fixed frame, side hung, top hung and patio door. See in addition page 2-7.

### Material

Wooden frame of laminated and finger-jointed pine with exterior aluminium cladding.

### Impregnation

All wooden parts are impregnated according to the P-marking rules. The impregnation fluid permeates approx. 40 mm into the ends of the wood and approx. 4 mm into other surfaces. The impregnation contributes to highly effective protection against rot.

### Surface treatment

Standard colour is white NCS S 0502-Y, gloss value 35 on wood and gloss value 80 for external aluminium cladding. See separate colour guide at elitfonster.se for alternative colour options and surface treatment.

### Glazing structure

3-pane sealed glazing unit installed with patented security fixing.

### Glass

3-glass sealed unit type T4-18, with 3 x 4 mm glasspane, one of which is an energy efficient pane. 18 mm spacer between the panes, both air gaps is filled with Argon.

### StormTite™ seal against wind and moisture

Extra sealing strip in the gap between frame and sash.

### Handles and fittings

See description under respective product type.

### Dimensions and sizes

Frame depth is 115 mm. Drawings in pdf- and dwg-format as well as size guide are available at elitfonster.se.

### Verified properties

Elitfönster's products undergo tests to meet stringent requirements. Below is a list of the classes we have had verified in tests at at RISE.

Airtightness	Class 4
Rain density	Class E 1200 (double doors 9A)
Resistance to wind load	Class 4C (double doors 3C)
Mechanical properties	Class 2
Heavy impact	Class 2
Reaction to fire impact	Class C-s1,d0
Manoeuvring forces openable	Class 2 (class 1 for side hung and door)
Class based on application	W5

## Options & accessories

Elitfönster offers a wide range of options which can both change the appearance or add unique features to your window. On pages 8-11 you can read more about internal profiling, glazing bars and mullions, as well as various fittings packages. Further information about different options including colours, glass, airing and ventilation etc is available at elitfonster.se. We also offer accessories such as blinds, pleated blinds, mosquito nets etc.

## P-marking, certification and warranties

### CE-marking

The product is CE-marked according to SS-EN 14351-1.

### P-marked production

Manufactured in a certified P-marked production process, which ensures that the product's quality and performance maintains a high level.

Certificate issued by RISE, Research Institutes of Sweden, according to certification rule 133 "Certification of production process for production of construction products (P-marked production)" in relation to reference: "Production of windows made of wood and wood/metal".

### Quality and environmental certification

The manufacturer is certified according to ISO 9001:2015, as well as according to the environmental management system ISO 14001:2015.

### Warranty (applies in Sweden)

Provided the instructions for storage, installation, care and maintenance are followed, the following warranty is provided for Elitfönster Original Alu:

- 10 year warranty against condensation between panes in sealed glazing units
- 10 year warranty on the window's (including the fittings) function
- 10 year warranty covering rot damage in the product's wooden parts

**Sizes** are indicated in modules. 1 module (M) = 100 mm.

**The module size** includes 20 mm space for caulking on width and height (i.e. 10 mm all around).

Example: Size 5/10 M entails frame outer width = 480 mm and frame outer height = 980 mm. In other words, the module sizes indicate the minimum size of the recess in the wall

# Top swing window AFHC

Product family	Product type	Model designation
Elitfönster Original Alu 100	Outward opening top swing window	AFHC

## Openability

Top swing window, outward opening, slide hung. Swing fitting, so called slide hung, makes the window horizontally tiltable 180° outside the facade.

## Standard handle

Hoppe Pure, aluminium silver.

## Fitting

Swing fitting in yellow chromated steel that is painted white externally on windows with aluminium cladding in NCS S 0502-Y. For other aluminium colours the swing fitting is externally clad with an aluminium profile in the same colour.

## Closing fitting


Nickel-free espagnolette in galvanised steel. Latches in hardened steel.

## Opening and airing

Fixed opening catch with opening 100 mm where the sashes are automatically restricted when the window is opened. The fitting must be disengaged to open more than 100 mm. The function re-engages when the window is closed. Meets the requirements for protection against falling out, max. permitted opening is 100 mm. Fixed airing position in striking plate.

## Multi-pane and combinations

The product can be supplied in versions with multi-pane, as well as in combinations with fixed frame. See [elitfonster.se](http://elitfonster.se) for more information.



## Lockable handle and security fittings

See page 8.



Outside



Inside

## Technical properties AFHC

### U-value

1.0 W/m<sup>2</sup> °K in **standard version**.

Down to 0.79 is available as an option, see the table below.

The U-value is indicated for size 1230x1480 mm according to EU standard.

### Sound reduction

Rw 34dB in **standard version**.

Up to Rw 44dB is available as an option, see the table below.

Sound value (dB)			U-value (Light transmission Lt-value %/Solar factor G-value %)		
Rw	Rw+C	Rw+Ctr			
<b>34*</b>	<b>31*</b>	<b>27*</b>	<b>1,0 (75/60)*</b>	0,81 (74/53)	0,79 (74/53)
38	36	32	1,1 (74/58)	0,83 (74/51)	0,81 (74/51)
39	37	33	1,1 (74/56)	0,83 (74/53)	0,81 (74/53)
44	43	40	1,1 (73/54)	0,92 (72/49)	0,90 (72/49)

\* standard

The above values refer to windows in standard design or with the glass combination required to achieve the respective sound, U, LT and G values. Some options and accessories such as glass, fittings, valves, etc. may mean that we cannot guarantee the reported value.

# Fixed frame AFKC

Product family	Product type	Model designation
Elitfönster Original Alu 100	Fixed frame	AFKC

## Openability

Not openable.

## Burglary class

Original Alu 100 fixed are reinforced according to description below to achieve RC2N.




1. Glazing method with patented security fixing.

Supplement with laminated glass 9.52 to achieve class RC2 or laminated glass 8.76 to achieve SBD (Secured by Design)

## Combinations

AFKC can be supplied in combination with AFHC.

See elitfonster.se for more information.



Outside



Inside

## Technical properties AFKC

### U-value

0.99 W/m<sup>2</sup> °K in **standard version**.

Down to 0.69 is available as an option, see the table below.

The U-value is indicated for size 1230x1480 mm according to EU standard.

### Sound reduction

Rw 31dB in **standard version**.

Up to Rw 46dB is available as an option, see the table below.

Sound value (dB)			U-value (Light transmission Lt-value %/Solar factor G-value %)		
Rw	Rw+C	Rw+Ctr			
<b>31*</b>	<b>29*</b>	<b>24*</b>	<b>0,99 (75/60)*</b>	0,71 (74/53)	0,69 (74/53)
37	35	31	1,0 (74/58)	0,73 (74/51)	0,71 (74/51)
38	36	32	1,0 (74/56)	0,73 (74/52)	0,71 (74/53)
45	44	39	1,0 (73/54)	0,84 (72/49)	0,82 (72/49)

\* standard

The above values refer to windows in standard design or with the glass combination required to achieve the respective sound, U, LT and G values. Some options and accessories such as glass, fittings, valves, etc. may mean that we cannot guarantee the reported value.

# Side hung AFSC

Product family	Product type	Model designation
Elitfönster Original	Outward opening	AFSC (1-pane)
Alu 100	side hung window	AFSC2 (2-pane)
		AFSC3 (3-pane)

## Openability

Outward opening side hung.

## Standard handle

Hoppe London, aluminium silver.

## Hanging fittings

Depending on the window's size, two or three lift-off hinges in galvanised and powder-coated steel. White hinges for windows with aluminium cladding in colour NCS S 0502-Y, silver for other colours. The hinge is equipped with security pins and is vertically adjustable. Stainless hinges (option) are recommended in coastal and lakeside areas.

## Closing fittings

Nickel-free espagnolette in galvanised steel with wedge bolt. Hook bolt espagnolette is offered as an option.


## Airing fitting

Window brake, one per window. Window brake is standard in the right pane from the inside for 2- and 3-pane window. Window brake can be supplied in all panes at a supplementary cost. Operated with the espagnolette's handle. Window lower than size M7 supplied solely with friction brake.

## Multi-pane and combinations

AFSC can also be offered in versions with 2- and 3-panes.

See elitfonster.se for more information.

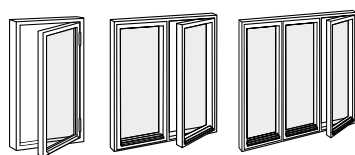

Outside

**Lockable handle and security fittings** See page 8.

## Technical properties AFSC

### U-value

1.1 W/m<sup>2</sup> °K in **standard version**.

Down to 0.80 is available as an option, see the table below.

The U-value is indicated for size 1230x1480 mm according to EU standard.

### Sound reduction

\*\* Values will be added shortly

Sound value (dB)			U-value (Light transmission Lt-value %/Solar factor G-value %)		
Rw	Rw+C	Rw+Ctr			
**	**	**	<b>1,1 (75/60)*</b>	0,82 (74/53)	0,80 (74/53)
**	**	**	1,1 (74/58)	0,84 (74/51)	0,82 (74/51)
**	**	**	1,1 (74/56)	0,84 (74/53)	0,82 (74/53)
**	**	**	1,1 (73/54)	0,93 (72/49)	0,91 (72/49)

\* standard

The above values refer to windows in standard design or with the glass combination required to achieve the respective sound, U, LT and G values. Some options and accessories such as glass, fittings, valves, etc. may mean that we cannot guarantee the reported value.

# Top hung AFÖC

Product family	Product type	Model designation
Elitfönster Original Alu 100	Outward opening top hung window	AFÖC

## Openability

Outward opening top hung.

## Standard handle

Hoppe London, aluminium silver.

## Fittings

Two lift-off hinges in galvanised and powder-coated steel.  
White hinges for windows with aluminium cladding in colour NCS S 0502-Y, silver for other colours. The hinge is equipped with security pins. Stainless hinges (option) are recommended in coastal and lakeside areas.

## Closing fitting

Nickel-free espagnolette in galvanised steel. Latches in hardened steel.

## Airing

Airing position in striking plate.

## Lockable handle and security fittings

See page 8.



Outside.

## Technical properties AFÖC 1-pane

### U-value

1.0 W/m<sup>2</sup> °K in **standard version**.

Down to 0.79 is available as an option, see the table below.

The U-value is indicated for size 1230x1480 mm according to EU standard.

### Sound reduction

Rw 34dB in **standard version**.

Up to Rw 44dB is available as an option, see the table below.

Sound value (dB)			U-value (Light transmission Lt-value %/Solar factor G-value %)		
Rw	Rw+C	Rw+Ctr			
<b>34*</b>	<b>31*</b>	<b>27*</b>	<b>1,0 (75/60)*</b>	0,81 (74/53)	0,79 (74/53)
38	36	32	1,1 (74/58)	0,83 (74/51)	0,81 (74/51)
39	37	33	1,1 (74/56)	0,83 (74/53)	0,81 (74/53)
44	43	40	1,1 (73/54)	0,92 (72/49)	0,90 (72/49)

\* standard

The above values refer to windows in standard design or with the glass combination required to achieve the respective sound, U, LT and G values. Some options and accessories such as glass, fittings, valves, etc. may mean that we cannot guarantee the reported value.

# Patio door ADC, ADC2

Product family	Product type	Model designation
Elitfönster Original Alu 100	Patio door and double door	ADC (ADFC/ADKC) ADC2 (ADFC2/ADKC2)

## Openability

Outward opening.

## Standard handle

Hoppe London with long backplate, aluminium silver. Double door is equipped with handle in active and passive door.

## Hanging fittings

Three lift-off hinges in galvanised and powder-coated steel. White hinges for doors with aluminium cladding in colour NCS S 0502-Y, silver for other colours.

The hinge is equipped with security pins and is vertically adjustable. Stainless hinges (option) are recommended in coastal and lakeside areas.

## Closing fitting

Single door: Hook bolt espagnolette in nickel-free galvanised steel with three side bolts. Hook bolt espagnolette offered as option.

Double door: Double espagnolettes. in active door with side bolts (two hook bolts, one side bolt) and end bolt. Passive door has shoot bolt with end bolts

## Airing fitting


Door brake, operated with the espagnolette's handle. Double doors have brake in both door leaves.

## Threshold

Standard threshold 42 mm, the threshold's colour follows the colours on the frame's inside. Threshold in brown-glazed pine with height 42 mm as well as low threshold in aluminium with height 25 mm are offered as options.

## Door filling

1. Primed door with smooth profile has oil-hardened board internally and aluminium plate externally.
2. Primed, antique version door has profiled execution on the inside with MDF-board as well as external aluminium plate.
3. Glazed door in standard version or with profiled inside has internal smooth pine plywood and aluminium plate externally .

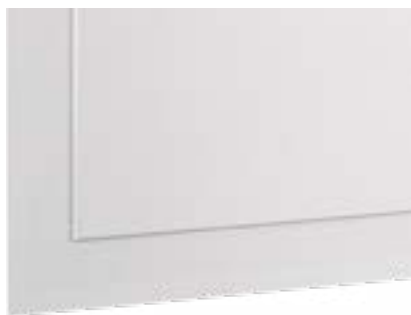

*Internal filling in profiled execution (antique).*

## Double doors

Left door viewed from the outside is standard on an double door, right door can be selected as an option.

## Burglary class

For Original Alu 100 patio door, fitting and fixing point are reinforced according to description below to achieve RC2N. Applies solely for fully glazed patio doors.

## Lockable handle and security fittings

See page 9.




*Outside.*

# Patio door ADC, ADC2

&gt;&gt; cont.


## Alignment single door

ADFC aligns with openable window  
ADKC aligns with fixed frames




### FUNCTIONAL DIMENSIONS (the figures are viewed from above)

**Dimension open door 90°**  
Frame outer width -51 mm



**Double door with equal partition, wicket door open**  
frame outer width /2-145 mm



**Child safety lock (option)**  
Max. permitted opening in childproof position = 100 mm




### Evacuation dimensions


According to the National Board of Housing, Building and Planning's Building Regulations, a free evacuation area is achieved when the width of the opening is at least 0.50 m and the height of the opening is at least 0.60 m. The sum of the width and height must be at least 1.50 m.

### FREE PASSAGE DIMENSION

**Single door**  
frame outer width -179 mm



**Double door, both door leaves open**  
frame outer width -255 mm



## Technical properties ADC, fully glazed version

### U-value

1,0 W/m<sup>2</sup> °K in **standard version**.

Down to 0,75 is available as an option, see the table below.

The U-value is indicated for size 1230x2180 mm. according to EU standard.

### Sound reduction

Rw 34dB in **standard version**.

Up to Rw 43dB is available as an option, see the table below.

Sound value (dB)			U-value (Light transmission Lt-value %/Solar factor G-value %)		
Rw	Rw+C	Rw+Ctr			
<b>34*</b>	<b>32*</b>	<b>28*</b>	<b>1,0 (75/60)*</b>	0,77 (74/53)	0,75 (74/53)
38	36	32	1,0 (74/58)	0,79 (74/51)	0,78 (74/51)
39	37	32	1,0 (74/60)	0,79 (74/53)	0,78 (74/53)
43	42	37	1,1 (73/54)	0,89 (72/49)	0,87 (72/49)

\* standard

## Technical properties ADC2 double door, fully glazed version

### U-value

1,1 W/m<sup>2</sup> °K in **standard version**.

Down to 0,78 is available as an option, see the table below.

The U-value is indicated for size 2000x2180 mm according to EU standard.

### Sound reduction

\*\* Values will be added shortly

Sound value (dB)			U-value (Light transmission Lt-value %/Solar factor G-value %)		
Rw	Rw+C	Rw+Ctr			
<b>**</b>	<b>**</b>	<b>**</b>	<b>1,0 (75/60)*</b>	0,80 (74/53)	0,78 (74/53)
**	**	**	1,0 (74/58)	0,82 (74/51)	0,80 (74/51)
**	**	**	1,1 (74/60)	0,82 (74/53)	0,80(74/53)
**	**	**	1,1 (73/54)	0,90 (72/49)	0,90 (72/49)

\* standard

The above values refer to patio doors in standard design or with the glass combination required to achieve the respective sound, U, LT and G values. Some options and accessories such as glass, fittings, valves, etc. may mean that we cannot guarantee the reported value.

# Fittings pack window



## **Standard handle\*** Handle Hoppe Pure

Aluminium (silver)  
Installation kit standard handle.

Includes: Int. handle with cover plate.

Standard for all windows.



## **Fittings pack 9**

White version  
Child protection airing fitting  
for window.

Includes: Fix 93, screws.



## **Fittings pack 13**

Aluminium (silver)  
Internal cover plate for loose handle. The  
cover is slidable.

Includes: Cover plate with holder.  
3 x screws.

Handle is purchased separately.



## **Loose handle**

Includes: Handle Tokyo  
Goes with fitting pack 13.



## **Fittings pack 15\***

Aluminium (silver)  
Installation kit KISI2 for window handle.

Includes: KISI2, child safety lock.



## **Fittings pack 22\***

White version  
Child protection catch arrangement, Fix 184.

Includes: Plastic coated wire.  
4 x screws.  
Fitting.



## **Fittings pack 30\*** Handle Hoppe Pure

Aluminium (silver)  
Installation kit security handle/  
child safety lock.

Includes: Internal handle with cylinder.  
Key.  
Cover plate.



## **Fittings pack 31\*** Handle Hoppe Pure

Aluminium (silver)  
Installation kit safety handle/child safety  
lock, KISI2.

Includes: Internal handle with cylinder.  
Key.  
Cover plate.  
KISI2, child safety lock.



## **Fittings pack 50** Handle Hoppe Pure

Aluminium (silver)  
Installation kit security handle

Includes: Internal handle with cylinder.  
Key.  
Cover plate.

Meets the requirements according to  
SS 3620, class A

\* Also available in black. Model Hoppe Tokyo.

# Fittings pack patio door



**Standard handle\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit internal handle with long backplate.

Includes: Internal handle L or R.  
3 x screws.  
Standard for all patio doors.



**Fittings pack 1\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit for internal handle with turn knob.

Includes: Internal handle L or R.  
3 x screws.



**Fittings pack 2\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit for external handle and internal handle with turn knob.

Includes: External handle straight.  
Internal handle L or R.  
3 x screws.



**Fittings pack 3\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit for ext. handle prepared for lock cylinder and int. handle with turn knob. Cylinder not included.

Includes: External handle straight.  
Internal handle L or R.  
3 x screws.

*Suitable cylinder ASSA 1209 or 1309 with long carrier.*



**Fittings pack 4\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit for internal handle prepared for lock cylinder. Cylinder not included.

Includes: Internal handle L or R.  
3 x screws.

*Suitable cylinder ASSA 1209 or ASSA 1309 with long carrier.*



**Fittings pack 5\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit for internal handle prepared for lock cylinder and external handle. Cylinder not included.

Includes: External handle straight.  
Internal handle L or R.  
3 x screws.

*Suitable cylinder ASSA 1209 or ASSA 1309 with long carrier.*



**Fittings pack 6\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit for ext- and internal handle prepared for lock cylinder. Cylinder not included.

Includes: External handle straight.  
Internal handle L or R.  
3 x screws.

*Suitable cylinder 2 x ASSA 1209 or 1309 int + ext. with long carrier.*



**Fittings pack 12**

Galvanised  
External pull handle.

Includes: External pull handle.  
2 x pop rivets.

\* Also available in black. Model Hoppe Tokyo.

cont. >>

# Fittings pack patio door

&gt;&gt; cont.

**Fittings pack 22\***

White version  
Child protection catch arrangement, Fix 184.

Includes: Plastic coated wire.  
4 x screws.  
Fitting.

**Fittings pack 31\***  
Handle Hoppe Pure

Aluminium (silver)  
Installation kit safety handle/child safety lock, KISI2.

Includes: Internal handle with cylinder, key, cover plate.  
KISI2, child safety lock.

**Fittings pack 50**  
Handle Hoppe Pure


Aluminium (silver)  
Installation kit security handle

Includes: Internal handle with cylinder.  
Key.  
Cover plate.  
Meets the requirements according to SS 3620, class A

**Fittings pack 43\*\***  
Internal code handle  
Matt chrome.

Includes: Supplied with one way screw and 2 x 1.5V AAA batteries.

Meets the requirements according to SS3620, class B.

**Fittings pack 43 passive\*\***  
Internal code handle  
Matt chrome.

Suitable for passive door leaf in a double door.

**Fittings pack 44\*\***  
Internal code handle + external handle  
London.

Matt chrome.

Includes: Supplied with one way screw and 2 x 1.5V AAA batteries.

\* Also available in black. Model Hoppe Tokyo.

\*\* The same model is also available in black.

# Antique profile, glazing bars and mullions

## Antique profile (option)


Internal profile on frame and sash, see picture for version.




## Glazing bars and mullions (option)

**Example of narrow (SP) and wide (BSP) removable glazing bars, can also be selected as intermediate glazing bar.**

Contact your retailer for other combinations.

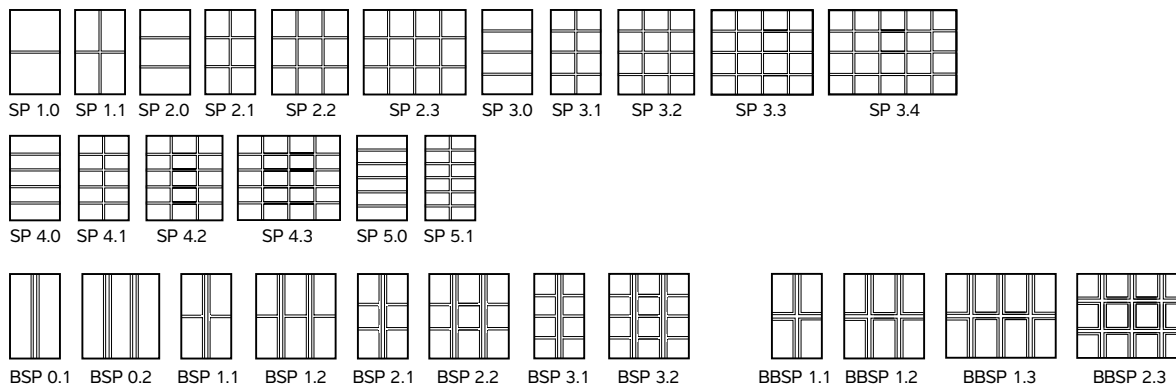

**Example of mullions, can be combined with glazing bars**



### Material and dimension

Type	Material	Narrow	Wide
Detachable glazing bars	Aluminium	30 mm	65 mm
Intermediate glazing bar	Aluminium	26 mm	45 mm
Fixed mullion that divides the panes	Wood/Aluminium		63 mm